

MM40 Digital Sensor Readout

- 4 ½ Digit Meter & Power Supply
- Fixed or Unregulated Excitation
- Front Panel Programmable
- 5V or 10V Sensor Supply



The lightweight MM40 Digital Sensor Readout features large 4 ½ digit LED display with full range from 19999 to 99999. The easy to use pushbutton zero adjustment and range configuration minimizes end-user setup time. Operating from 85 to 250VAC 50/60 Hz, the rugged NEMA 4X/IP165, IP20 touch safe case helps ensure trouble-free operation in a wide range of laboratory and industrial environments. All connectors are screw terminals.



FEATURES

- Modular construction
- 1/8 DIN case
- IP20 touch safe
- Compact size
- Rugged construction
- Attractive packaging
- Includes panel gasket and mounting brackets



APPLICATIONS

- Instrumentation Labs
- Test Stands
- Process Monitoring
- Rack Mounts

dimensions

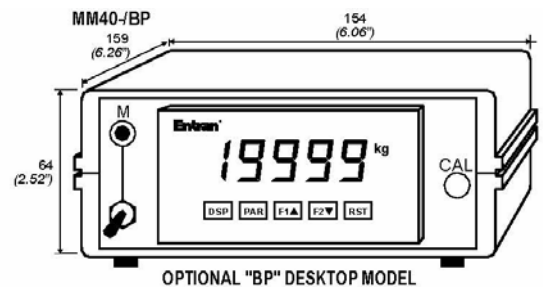

wiring

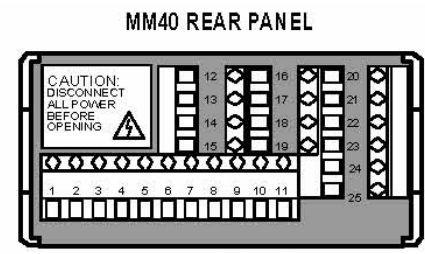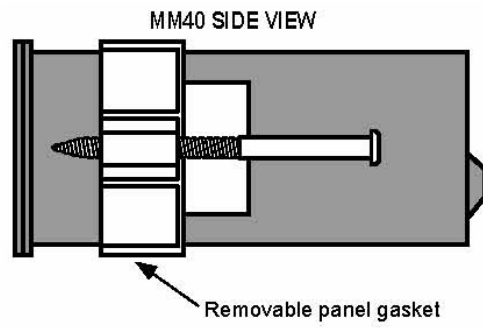

(Order sensors with 5V or 10V excitation.)

Supply for Sensors, General Characteristics

SENSOR SUPPLY VOLTAGES ($\pm 2\%$):	5 VDC @ 65 mA max., 10 VDC @ 125 mA max., jumper selectable. (If standard sensor excitation is not 5V or 10V, order sensor with excitation voltage option V5 or V10.)
OPERATING TEMPERATURE:	0°C to 45°C (32°F to 113°F)
TEMPERATURE SHIFT:	20 ppm/°C max
POWER:	85 to 250 VAC. 50/60 Hz. 15 VA
CONNECTIONS:	Screw terminal
CASE:	1/8 DIN (DIN 43700) Polycarbonate, NEMA 4X/IP65 Indoor use. IP20 Touch safe. Panel gasket and mounting brackets included.
WEIGHT:	295g (10.4 oz.)
FACEPLATE UNITS (Blank if not specified):	B = "bar" K = "kgs" L = "lbs" N = "N" for Newtons P = "psi" = " "
CE CONFORMANCE	EN 61010-1, EN 50082-2, EN 50081-2

Meter Display

DISPLAY:	4 ^{1/2} DIGITS, 0.56" (14.2 mm) red LED
FULL RANGE:	-19999 to 99999
INPUTS FULL RANGE:	± 24 mV or ± 240 mV by internal selection
ACCURACY:	$\pm 0.04\%$ of range ± 1 digit
RANGE ADJUSTMENT:	2 data-point pairs must be programmed
ZERO ADJUSTMENT:	Pushbutton Tare Zero, up to 100% full range
DECIMAL POINT:	0 to 0.0000, front panel programmable
ANALOG OUTPUT:	0-10 VDC, 10 K Ω load min.

Options and Accessories

OUTPUTS AND REPLAYS:	AI = Analog output in Current: 0-20 mA or 4-20 mA: 500 Ω load max., internal selection
	RS232 = RS232 communication port: Data: 7/8 bits Baud: 300 to 19200 Parity: no, odd or even Bus Address: Selectable 0 to 99, Max
	HL = Setpoint Alarm: Two Form C Relays, 5A at 120/240VAC for one relay energized. Total current with both relays energized not to exceed 5A.
OPTIONAL CASE:	BP = MM40 mounted in Desktop Case with On/Off switch and calibration feature (80% FSO when ordered with Measurement Specialties sensors). The "BP" Desktop Case is not compatible

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

Model number construction

Series	Sensor Supply	Faceplate	Options
MM40	5 = 5VDC 10 = 10VDC	B K L N	AI HL RS232 BP (cannot be ordered with HL or RS232)

北京汇润科贸有限公司
 电话：+ 86 010 6478 7697
 直线：133 8128 1890
 传真：+ 86 010 5894 9029
 邮箱：sales@aq315.com
<http://www.aq315.com>

Example: MM40-5B – Model MM40, 5VDC Sensor Supply, "Bar" Faceplate Units