

# Model 52 Accelerometer





DC Response Accelerometer  
Miniature Package  
Low Cost  
Reliable Performance



## The Model 52 Accelerometer

is based on an advanced piezoresistive MEMS sensing element which offers exceptional dynamic range and stability. This unit features a full bridge output configuration with an operating temperature range from -40 to +90°C. A slight amount of internal gas damping provides outstanding shock survivability and a flat frequency response up to 7kHz.

## dimensions

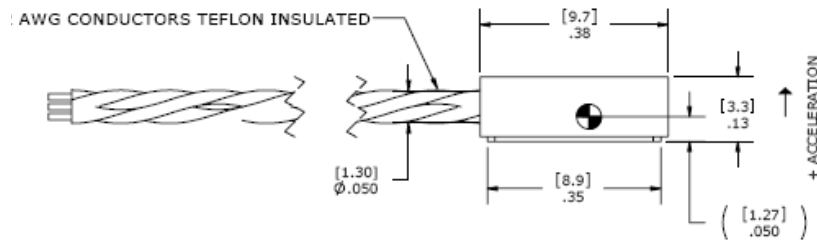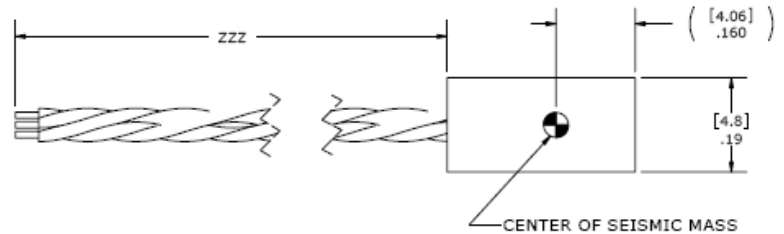


## FEATURES

- Piezoresistive MEMS Sensor
- ±50g to ±2,000g Ranges
- 2-10 Vdc Excitation
- <± 50 mV Zero Offset
- -40 to +90 °C Temperature Range
- Linearity ±1%

## APPLICATIONS

- Safety Impact Testing
  - Auto
  - Truck
  - Recreational Vehicles
- Shock Testing

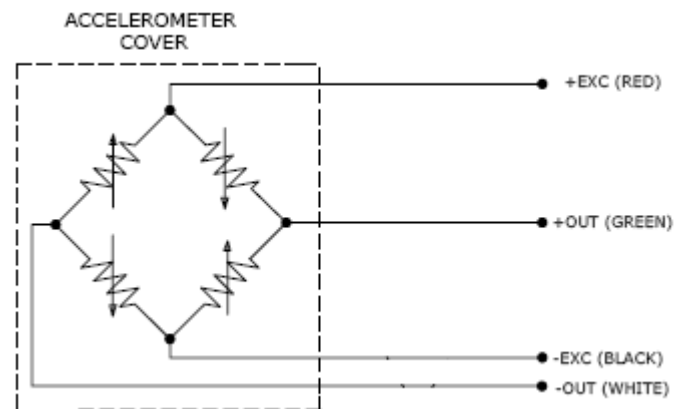

# Model 52 Accelerometer

## performance specifications

All values are typical at  $\pm 24^{\circ}\text{C}$ , 100 Hz and 10 Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1004 for Plug & Play DC Accelerometers.

### Parameters

#### DYNAMIC

	$\pm 50$	$\pm 200$	$\pm 500$	$\pm 2000$	Notes
Range(g)	$\pm 50$	$\pm 200$	$\pm 500$	$\pm 2000$	
Sensitivity (mV/g) <sup>1</sup>	2	0.9	0.4	0.15	
Frequency Response (Hz)	0-400	0-600	0-800	0-2000	$\pm 2\%$
	0-1000	0-1400	0-2000	0-5000	$\pm 5\%$
	0-1400	0-1900	0-2800	0-7000	$\pm 1\text{dB}$
Resonant Frequency (Hz)	4000	8000	15000	26000	
Non-Linearity (% FSO)	$\pm 1$	$\pm 1$	$\pm 1$	$\pm 1$	
Transverse Sensitivity (%)	<3	<3	<3	<3	
Shock Limit (g)	5000	5000	5000	5000	

#### ELECTRICAL

Zero Acceleration Output (mV)	< $\pm 50$				
Excitation (Vdc)	2 to 10				
Input Resistance	2400-6000				
Output Resistance ( $\Omega$ )	2400-6000				
Insulation Resistance ( $\text{M}\Omega$ )	>100				@50Vdc
Ground Isolation	Isolated from mounting surface				

#### ENVIRONMENTAL

Thermal Zero Shift (%FSO/ $^{\circ}\text{C}$ (%FSO/ $^{\circ}\text{F}$ ))*	$\pm 0.05 (\pm 0.03)$				$0^{\circ}\text{C}$ to $+50^{\circ}\text{C}$
Thermal Sensitivity Shift (%/ $^{\circ}\text{C}$ (%/ $^{\circ}\text{F}$ ))*	$-0.20 \pm 0.05 (-0.11 \pm 0.03)$				$0^{\circ}\text{C}$ to $+50^{\circ}\text{C}$
Operating Temperature ( $^{\circ}\text{C}$ )	-40 to +90				
Storage Temperature ( $^{\circ}\text{C}$ )	-40 to +90				
Humidity	Epoxy Sealed, IP61				

#### PHYSICAL

Case Material	Plastic				
Cable (Integral 30 Foot Cable)	4x #32 AWG Conductors Teflon® Insulated				Cable not included
Weight (grams)	0.5				
Mounting	Adhesive				

<sup>1</sup> Output is ratiometric to excitation voltage

**Calibration supplied:** CS-SENS-0100 NIST Traceable Amplitude Calibration at 100Hz

**Optional accessories:** 101 Three Channel DC Signal Conditioner Amplifier  
140 Auto-zero Inline Amplifier

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

## ordering info

PART NUMBERING Model Number+Range+Excitation+Cable Length+Options

52-GGGG-VV-CCC-XY  
 | | | | Options  
 | | | Cable (360 is 360 inches)  
 | | Excitation (10 is 10 Vdc)  
 | Range (0500 is 500 g)

Example: 52-2000-10-360-XY  
 Model 52, Standard Configuration: 2000g, 10V Excitation, 360" (30ft.) Cable, No Options

北京汇润科贸有限公司  
 电话: +86 010 5601 8989  
 +86 010 5601 7979  
 传真: +86 010 5885 7266  
 邮箱: [sales@aq315.com](mailto:sales@aq315.com)  
<http://www.aq315.com>