

Triaxial Rate Gyro
±50, ±150, ±300, ±600°/sec Ranges
< ±6°/sec Offset Stability



Technical Data*

Features and Benefits

High Accuracy and Linearity over Wide Temperature Range

The voltage output for each axis of the 31206B is directly proportional to the rotational rate along that axis. Each DC-coupled output is fully scaled, referenced, and temperature compensated.

Calibration Certificate

Each 31206B is supplied with a calibration certificate listing sensitivity and offset needed to ensure rapid and efficient system implementation.

Self-Test on Digital Command

A TTL-compatible self-test input causes a simulated rotational rate to be injected into all three sensors to verify channel integrity.

Small Size

Complete conditioned triaxial rate gyro in less than a cubic inch.

Built-In Power Supply Regulation

Unregulated DC power from +8.5 to +36 volts is all that is required to measure rotational rates on all axes.

Suitable for Harsh Environments

The 31206B is robust and can be used in harsh environments. The unit will survive 2000 g powered and unpowered.

Three Year Warranty

Measurement Specialties 31206B Triaxial Rate Gyros are covered by a three year return to factory warranty.

**Precisely Measure
Real-World Rates**

Measurement Specialties' 31206B Triaxial Rate Gyro is capable of sensing angular rate around three orthogonal axes. Fully temperature compensated analog outputs are available for the X, Y and Z axes.

Choose the range option best suited for your application to measure ±50°/sec, ±150°/sec, ±300°/sec, and ±600°/sec rotational rates on each of three axes.

Each axial sensor has been tested over the -40 to +85°C temperature range and has a nominal full scale output swing of ±2 Volts. The zero rate output level is nominally +2.5 volts. Precise values for each axis are available on the included calibration certificate. Custom versions of the 31206B can be provided for applications which require different ranges and/or bandwidths.

北京汇润科贸有限公司

电话：+86 010 5601 8989

+86 010 5601 7979

传真：+86 010 5885 7266

邮箱：sales@aq315.com


<http://www.aq315.com>

Specifications for 31206B - improved specifications available upon request


T_A = T_{MIN} to T_{MAX}; 8.5 ≤ V_S ≤ 36 V; Acceleration = ±1g, Angular Rate = 0°/sec unless otherwise noted; within one year of calibration.

Parameter	Min	Typical	Max	Units	Conditions/Notes
Range & Sensitivity at 25°C					Must specify via Option Rnnn, see Ordering Info
±600°/sec FSR	2.8	3.1	3.4	mV/°/sec	Precise values on cal certificate
±300°/sec FSR	5.6	6.3	6.9	mV/°/sec	Precise values on cal certificate
±150°/sec FSR	11.2	12.5	13.8	mV/°/sec	Precise values on cal certificate
±50°/sec FSR	22.5	25	27.5	mV/°/sec	Precise values on cal certificate
Drift T _{MIN} to T _{MAX}		2.5		% FSR	
Zero g Bias Level					
At 25°C		2.50		V	Precise values on cal certificate
Drift T _{MIN} to T _{MAX}		±3.0	±6.0	°/sec	
Alignment					
Deviation from Ideal Axes		±1.5		degrees	Precise values on cal certificate Can be compensated if required
g Sensitivity		0.2		°/sec/g	Affects offset
Nonlinearity		0.1		% FSR	Best fit straight line
Frequency Response	0		100	Hz	Upper cutoff per Option Bnnn, -3 dB pt ±10%
Noise Density		0.05		°/sec/√Hz	T _A = 25°C
Self Test Input Impedance	10			kΩ	Pullup. Logic "1" ≥ 3.5 V, Logic "0" ≤ 1.5 V
Self Test Response w/ST pin grounded					±30% may indicate defective axis
±600°/sec FSR		-0.275		V	
±300°/sec FSR		-0.540		V	
±150°/sec FSR		-1.0		V	
±50°/sec FSR		-1.9		V	
Temperature Sensor					
Sensitivity		9.1		mV/°C	
+25°C Bias Level		2.5		V	
Outputs					
Output Voltage Swing	0.25		4.75	V	I _{OUT} = 1 mA, Capacitive load < 1000 pF
Power Supply (V_S)					
Input Voltage Limits	-20		+38	V	-20 V continuous
Input Voltage - Operating	+8.5		+36	V	
Input Current		18	30	mA	No load, quiescent
Rejection Ratio		>120		dB	DC
Temperature Range (T_A)	-40		+85	°C	
Mass		35		grams	
Shock Survival	-2000		+2000	g	Any axis for 0.5 ms, powered or unpowered

Mechanical

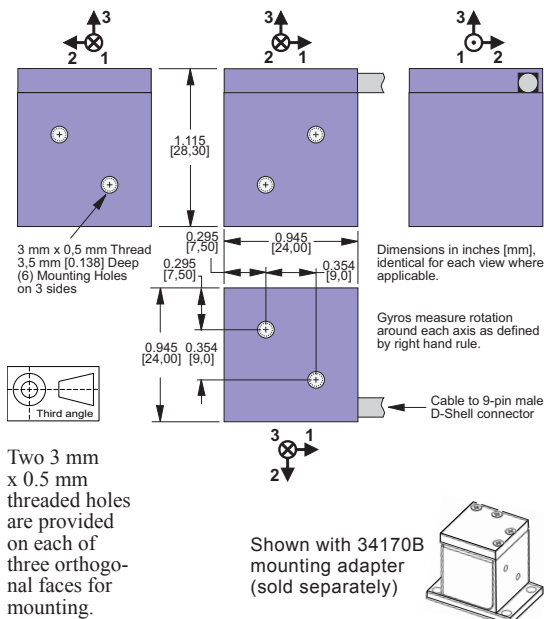

Connections

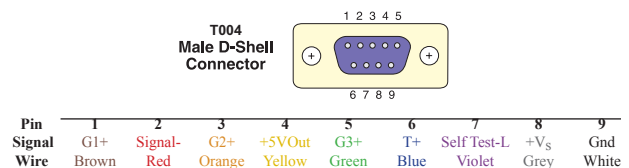

Ordering Information

