

A545 Series

DC-Operated,
Single Axis Linear Accelerometer


Sherborne Sensors
.... the first choice in precision

Features

- Ranges $\pm 2g$ to $\pm 100g$
- Essentially zero temperature coefficient of damping ratio
- Integral temperature compensation
- DC input - DC output
- High reliability



Introduction

The Sherborne Sensors' range of Solid State Accelerometers measure vector acceleration with high accuracy and incorporate a micromachined piezo-resistive strain gauge bridge silicon sensor incorporating an gas damping feature. Unlike fluid damped devices the gas damping employed is essentially independent of temperature. The transducer also incorporates positive mechanical stops conferring excellent shock resistance.

The accelerometer is compensated for the effects of temperature on both sensitivity and zero.

Typical applications include data acquisition systems, crash recorders, fatigue life monitoring and prediction; monitoring and controlling deceleration in mass transit systems; road bed analysis and fault detection equipment for high speed railways; military and civil flight simulators; autopilots and low frequency vibration monitoring.

In addition to the instruments offered in this bulletin Sherborne Sensors design and develop accelerometers for specific applications. These custom designed units can be manufactured and tested to conform to specific requirements and standards.

Designed for operation from an unregulated DC power source, the A545 is packaged in a robust aluminium alloy housing with solder pin connections. The accelerometer has a wide-range useable frequency response from DC to several kHz.



北京汇润科贸有限公司
邮箱: sales@aq315.com

电话: +86 010 5601 8989
+86 010 5601 7979

<http://www.aq315.com>
Sherborne Sensors, a Nova Metrix company



A545 Single Axis - 2013 Iss 1

A545 Series

DC-Operated,
Single Axis Accelerometer



General Specification

Input

Ranges ($\pm g$) 2; 5; 10; 20; 50; 100
Input Voltage 14.5 to 27Vdc
Input Current 5mA dc max.

Output at 25°C

Zero Offset $\leq \pm 2$ mV
Nonlinearity $\leq \pm 0.5\%$ FRO
Hysteresis $\leq 0.02\%$ FRO
Resolution $\leq 0.0005\%$ FRO
Cross Axis Sensitivity $\leq \pm 1\%$ FRO
Noise Output 10 μ V (rms) max
Damping Ratio 0.7 (± 0.2) @ 25°C
Output Impedance 1.2 to 6.5 k Ω

Environmental

Temp. Operating -40°C to +105°C
Temp. Compensated 0°C to +50°C
Temp. Storage -55°C to +130°C
Thermal Sensitivity Shift $\leq \pm 0.02\%$ FRO/°C
Thermal Zero Shift $\leq \pm 0.02\%$ FRO/°C
Acceleration limit 400g for 2 to 10 g versions, 20 x range or 2000g, whichever is lower for other versions (any direction)
Humidity/Immersion IP65
Insulation Resistance ≥ 20 M Ω at 50V dc

Physical

Sensitive Axis Alignment Vertical to mounting face
Weight 40 grams max

Range (g)	Sensitivity (Min/Max) (mV/g)	Resonant Frequency (Hz)	Frequency Response (Hz $\pm 5\%$)
± 2	8.0/16.0	700	0 to 150
± 5	4.8/7.2	800	0 to 250
± 10	2.4/3.6	1000	0 to 350
± 20	1.2/1.8	1500	0 to 550
± 50	0.48/0.72	4000	0 to 1000
± 100	0.24/0.36	6000	0 to 1300

Electrical Connections

Solder Pin Connections Pin A - + dc excitation
Pin B - 0V dc excitation
Pin C - Signal
Pin D - Signal
Pin E - not connected
Pin F - not connected


DESIGNATION & ORDERING CODE

A545 - 0001 - ☐ ☐ G

Series Number _____

1. Single-axis (Z) _____

Range in g _____

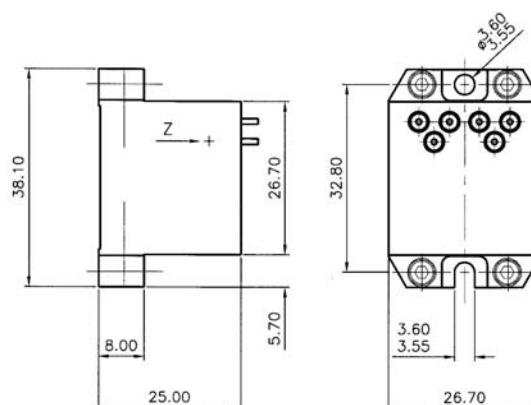

北京汇润科贸有限公司
邮箱: sales@aq315.com

电话: +86 010 5601 8989
+86 010 5601 7979

<http://www.aq315.com>
Sherborne Sensors, a Nova Metrix company

