

Tri-axial IEPE accelerometer



Features

- Tri-axial measurement
- Miniature cube
- Adhesive or stud mounting
- Hermetic seal
- Annular shear mode
- Wide temperature range
- Wide frequency response

Application

- Vibration monitoring
- Shock testing
- Road testing
- Modal analysis
- Aircraft testing

Dynamic

Sensitivity, $\pm 10\%$, 25°C	100 mV/g
Acceleration range	50 g peak
Amplitude nonlinearity.....	1%
Frequency response:	
$\pm 5\%$	2 - 4,000 Hz
$\pm 1\text{dB}$	1 - 10,000 Hz
$\pm 3 \text{ dB}$	0.4 - 12,000 Hz
Resonance frequency.....	40 kHz
Transverse sensitivity, max.....	5% of axial
Temperature response:	
-50°C	-10%
$+120^\circ\text{C}$	+10%

Electrical

Power requirement: voltage source	18 - 30 VDC
current regulating diode	2 - 10 mA
Electrical noise, Broadband Spectral(g):	
1 Hz to 10 kHz.....	500 μg
Output impedance, max.....	100 Ω
Bias output voltage.....	10 VDC
Grounding.....	Case grounded

Environmental

Temperature range.....	-50 to 120 $^\circ\text{C}$
Vibration limit.....	500 g peak
Shock limit.....	5,000 g peak
Electromagnetic sensitivity, equiv g, max	70 $\mu\text{g/gauss}$
Sealing	Hermetic
Base strain sensitivity, max.....	0.0002 g/ μstrain



Physical

Sensing element design.....	PZT ceramic/shear
Weight.....	12 grams
Case material.....	Titanium
Output connector.....	4 pin

Accessories

- Mounting stud: M5(-M), 10-32(-E), or W/O
- Mating cable with BNCx3 output
- Calibration certificate

Note: Frequency response limits spectral and noise values are typical

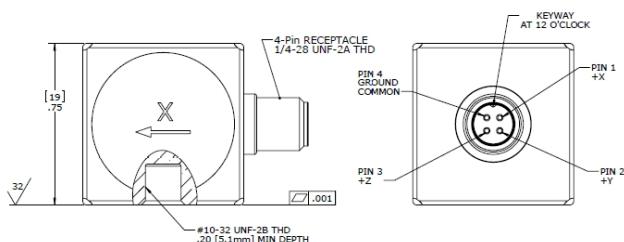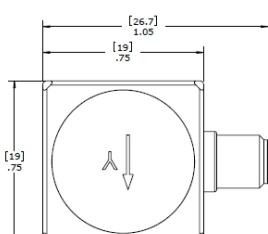

Ordering Information

530A-50-M

Mounting stud
Range in g
Output type
Model