

Miniature tri-axial IEPE accelerometer



Dynamic

| | |
|----------------------------------|-----------------|
| Sensitivity, ±10%, 25°C..... | 10 mV/g |
| Acceleration range | 500 g peak |
| Amplitude nonlinearity..... | 1% |
| Frequency response: | |
| ± 5%..... | 2 - 4,000 Hz |
| ±1dB..... | 1- 10,000 Hz |
| ± 3 dB..... | 0.5 - 12,000 Hz |
| Resonance frequency..... | 40 kHz |
| Transverse sensitivity, max..... | 5% of axial |
| Temperature response: | |
| -50°C..... | -10% |
| +120°C..... | +10% |

Electrical

| | | |
|--|--------------------------------|---------------|
| Power requirement: | voltage source | 18 - 30 VDC |
| | current regulating diode | 2 - 10 mA |
| Electrical noise, Broadband Spectral(g): | | |
| 1 Hz to 10 kHz..... | | 800µg |
| Output impedance, max..... | | 100Ω |
| Bias output voltage..... | | 10 VDC |
| Grounding..... | | Case grounded |

Environmental

| | |
|---|-----------------|
| ENVIRONMENTAL | |
| Temperature range..... | -50 to 120°C |
| Vibration limit..... | 1000 g peak |
| Shock limit..... | 5,000 g peak |
| Electromagnetic sensitivity, equiv g, max | 90 µg/gauss |
| Sealing | Hermetic |
| Base strain sensitivity, max..... | 0.0002 qustrain |



Physical

| | |
|-----------------------------|-------------------|
| Sensing element design..... | PZT ceramic/shear |
| Weight..... | 4 grams |
| Case material..... | Titanium |
| Output connector..... | 4 pin |

Accessories

Mounting stud: M3(-M)
Mating cable with BNCx3 output
Calibration certificate

Note: Frequency response limits spectral and noise values are typical

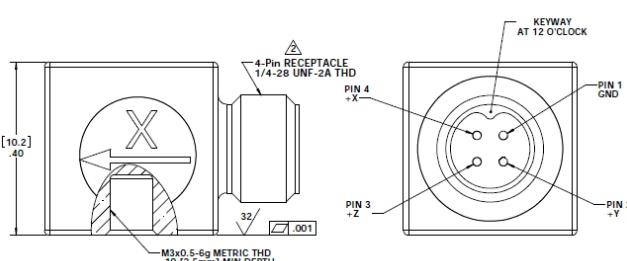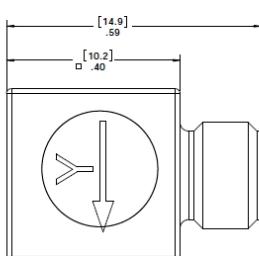

Ordering Information

730A-500-M

