

Tri-axial static response accelerometer

Dynamic

FSO, ±10%, 24°C.....	±2000 mV
Acceleration range(g)	2/5/10/50/200
Amplitude nonlinearity.....	1%
Frequency response(+/-3dB):	
2g.....	0 - 400 Hz
5g.....	0 - 400 Hz
10g.....	0 - 500 Hz
50g.....	0 - 500 Hz
200g.....	0 - 1000 Hz
Transverse sensitivity, max.....	3% of axial

Electrical

Power requirement:	5.5 - 30 VDC
Zero voltage.....	2.5±0.1V
Current consumption	<10 mA
Residual noise, Broadband Spectral:	
5g/10g.....	500µVRMS
2g/50g.....	1000µV RMS
200g.....	1300µV RMS
Output impedance.....	<100 Ω
Insulation resistance(@500Vdc).....	>100 M Ω
Turn-on time.....	<100 mS

Environmental


Temperature range.....	-40 to 85°C
Thermal zero shift(max. ref.24°C).....	±2%FSO
Thermal sensitivity shift(max. ref.24°C).....	±2%
Vibration limit.....	100 g peak
Shock limit.....	5,000 g peak
Sealing	IP67

Physical

Sensing element.....	MEMS(VC)
Weight.....	15 grams
Case material.....	Anodized aluminum
Mounting.....	M3 Screws
Output connector.....	Option



Accessories

- 2x M3 Screws (Mounting torque 0.7 Nm)
- 5 Meter mating cable(or customers specified)

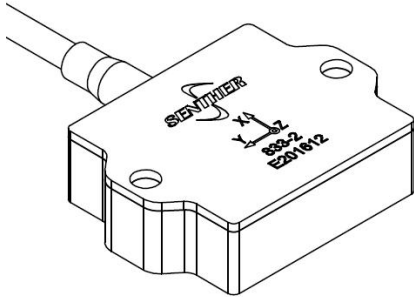

Features

- Static response
- 2 to 200g full scale
- Motion, low frequency, tilt
- 5K g shock survivability
- Temperature compensation

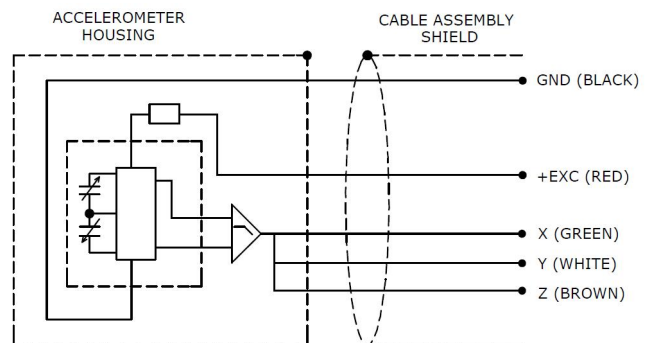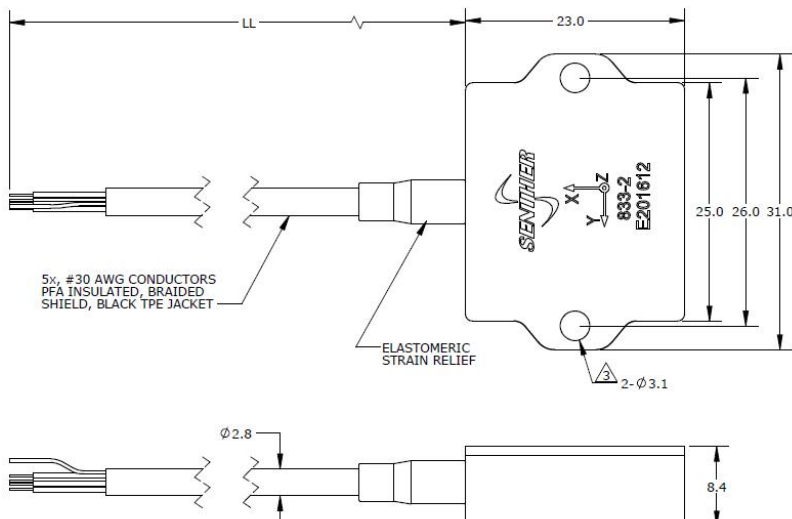

Ordering Information

833-5-3	Special cable length(meter)
	Range in g
	Model