


Model 3058A Accelerometer



Piezoresistive MEMS
DC Response, Gas Damped
Screw Mounted
Integral Temp Compensation

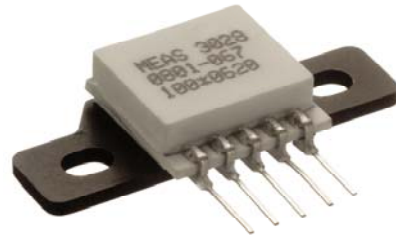

The **Model 3058A** is a silicon MEMS accelerometer with integral temperature compensation. The accelerometer is packaged on a ceramic substrate with a metal bracket which can be used to bolt the sensor to the mounting location. The accelerometer is offered in ranges from $\pm 2g$ to $\pm 100g$ range and provides a flat frequency response to minimum 1500Hz. The silicon MEMS sensor is gas damped and incorporates over-range stops for high-g shock protection.

For a similar accelerometer designed for adhesive mounting, see the model 3052A.


FEATURES

- Bolt Mounted
- $\pm 1.0\%$ Non-Linearity
- 0 to $+50^{\circ}\text{C}$ Temp Compensation
- Built-in Over-range Stops
- Low Power Consumption

APPLICATIONS

- Vibration & Shock Monitoring
- Motion Control
- Impact & Shock Testing
- Transportation Measurements
- Embedded Applications
- Machinery

dimensions

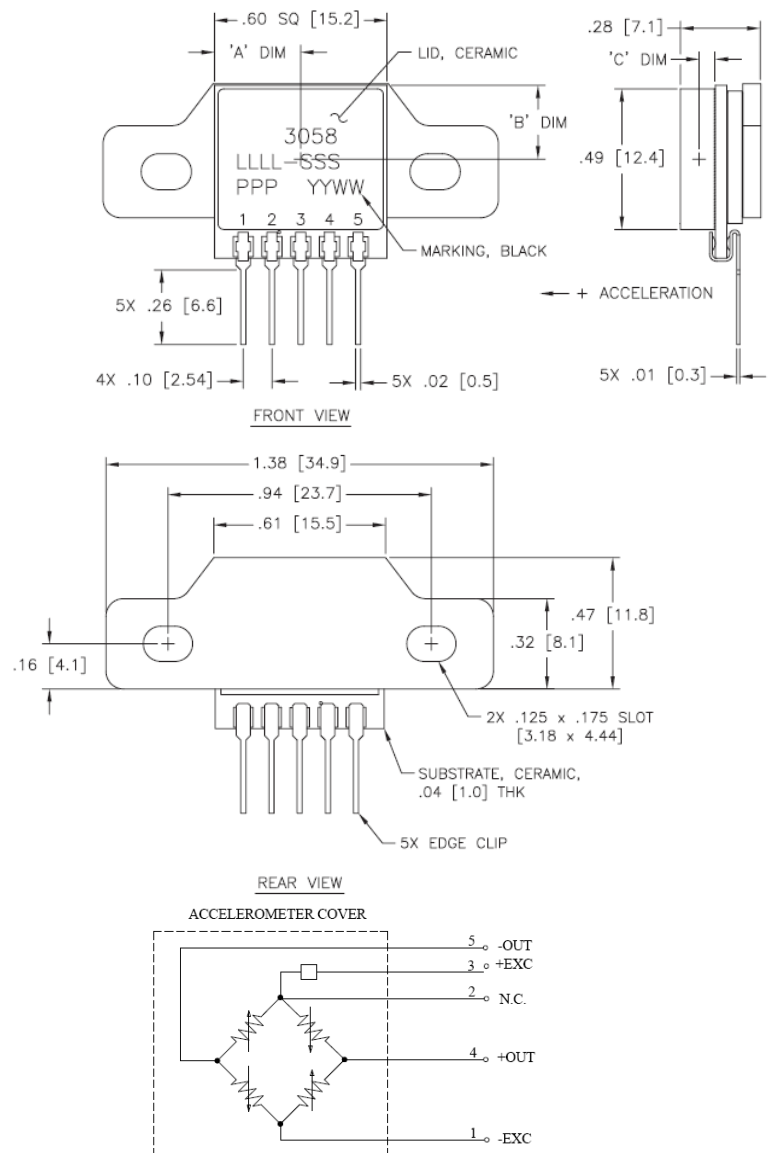

Model 3058A Accelerometer

performance specifications

All values are typical at +24°C, 100Hz and 5Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1002 for Embedded DC Accelerometers.

Parameters

DYNAMIC

	±2	±5	±10	±20	±50	±100	Notes
Range (g)							
Sensitivity (mV/g) ¹	8.0-16.0	4.8-7.2	2.4-3.6	1.2-1.8	0.48-0.72	0.24-0.36	@5Vdc Excitation
Frequency Response (Hz)	0-150	0-250	0-350	0-550	0-1000	0-1300	±5%
Natural Frequency (Hz)	700	800	1000	1500	4000	6000	
Non-Linearity (%FSO)	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<1 Typical
Damping Ratio	0.7	0.7	0.7	0.7	0.6	0.5	
Shock Limit (g)	3000	3000	3000	3000	5000	5000	

ELECTRICAL

Zero Acceleration Output (mV)	±2						Differential	
Excitation Voltage (Vdc)	2.7 to 12							
Input Impedance (Ω)	1200-6500							
Output Impedance (Ω)	1200-6500							
Insulation Resistance (MΩ)	>100						@50Vdc	
Residual Noise (µV RMS)	10						Maximum	
Ground Isolation	Isolated from Mounting Surface							

ENVIRONMENTAL

Thermal Zero Shift (%FSO/°C)	±0.060						0 to +50°C
Thermal Sensitivity Shift (%/°C)	±0.060						0 to +50°C
Operating Temperature (°C)	-40 to +125						
Compensated Temperature (°C)	0 to +50						
Storage Temperature (°C)	-40 to +125						
Humidity	Epoxy Sealed, IP61						

PHYSICAL

Case Material	Aluminum Flange, Ceramic Cover
Weight (grams)	4.5
Mounting	2x #4-40 Mounting Screws
Mounting Torque	6 lb-in (0.7 N-m)

¹ Output is ratiometric to excitation voltage

Calibration supplied: CS-SENS-0100 NIST Traceable Amplitude Calibration at 100Hz

Optional accessories: 101 Three Channel DC Signal Conditioner Amplifier
140 Auto-Zero Inline Amplifier

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ordering info

PART NUMBERING Model Number+Range+Electrical Connection

3058A-GGG-P

I | I _____ Electrical Connection (P=pins)
I | _____ Range (010 is 10g)

Example: 3058A-010-P
Model 3058A, 10g, Pins

北京汇润科贸有限公司

电话: +86 010 5601 8989

+86 010 5601 7979

传真: +86 010 5885 7266

邮箱: sales@aq315.com

<http://www.aq315.com>